


ADARA Axis 7700 Series

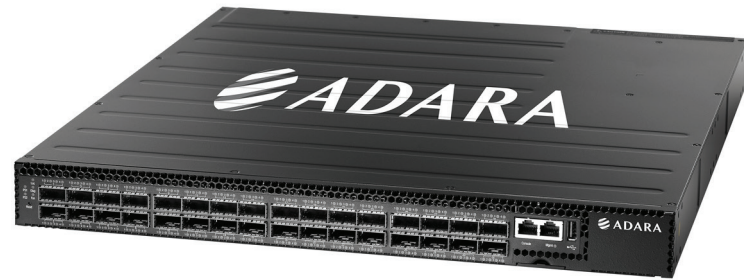

Product Highlights

Performance

- Cost-effective, bare-metal switch infrastructure for data center fabric
- 32 x QSFP28 switch ports, each supporting 1 x 100 GbE or 1 x 40 GbE, or via breakout cables, 2 x 50 GbE or 4 x 25 GbE or 4 x 10 GbE.
- Layer 2 or Layer 3 forwarding of 3.2 Tbps full duplex
- Deploy as Top-of-Rack switch supporting 10 or 25 GbE to servers, with 40 or 50 or 100 GbE uplinks
- Deploy as spine switch supporting 40, 50, or 100 GbE ToR and spine interconnects.

Robust Hardware

- Hot-swappable, redundant PSUs
- Hot-swappable, redundant fans
- Hot/Cold Aisle with port-to-power and port-to-port airflow SKUs
- Management: Ethernet and console RJ-45 ports.
- Energy Efficiency: 310 W typical power consumption without pluggable optics.

Flexible high-performance switch for SDN applications.

The ADARA Axis 7700 switches are Top-of-Rack (TOR) or spine switches for high-performance data centers. In a compact 1RU form factor, the switches provide line-rate L2 and L3 switching across the 32 x QSFP28 ports, supporting up to 32 x 40/100 GbE, 64 x 50 GbE, or 128 x 10/25 GbE connections.

ADARA software running on this switch provides software solutions including OpenFlow Controller, L2-L3 switching, and other SDN applications.

Software Features

L2 Features

- Auto-negotiation for port speed and duplex
- Flow control: IEEE 802.3x & back-pressure
- Switching mode: store-and-forward
- Spanning Tree Protocol:
 - 802.1D, 802.1w, & 802.1s
 - Spanning Tree Fast Forwarding
 - Edge port
 - Loop guard
 - BPDU filter/guard
 - Auto Edge
 - TCN guard
 - Root guard
- VLANs
 - IEEE 802.1Q tagged based
 - Port-based (up to 4094 VLANs)
 - Private VLAN
 - GARP/GVRP/GMRP
 - 802.1v protocol VLAN
 - Voice VLAN
 - MAC-based VLAN
 - IP-subnet VLAN
 - QinQ
- VTP v1/v2
- Storm control
 - Broadcast
 - Unknown multicast
 - Unknown unicast
- IGMP snooping
 - IGMP snooping v1/v2/v3
 - IGMP v1/v2 querier
 - IGMP immediate leave
- Link Aggregation
 - 802.3ad with LACP
 - Cisco EtherChannel Like
 - Unicast/Multicast traffic balance over trunking port (dst-ip, dst-mac, src-dst-ip, src-dst-mac, src-ip, src-mac)
- Multi-chassis LAG (MLAG)
- Link state
- Port backup

QoS

- Priority queues: 8 queues
- Scheduling for priority queue: WRR, Strict and hybrid (WRR+Strict)
- COS: 802.1p, IP Precedence, & DSCP
- DiffServ
- Port rate limit
- Auto VoIP
- iSCSI optimization

Security

- Static and dynamic port security (MAC-based)
- 802.1x: port-based, MAC-based, auto VLAN assignment, QoS assignment, guest VLAN, unauthenticated VLAN
- ACL: L2/L3/L4
- IPv6 ACL: L3/L4
- RADIUS: authentication and accounting (up to 32 servers)
- TACACS+: authentication (up to 5 servers)
- HTTPS and SSL (AES 128-cbc, 3ES-cbc, Blowfish-cbc)
- SSH 1.5/v2.0 (AES 128-cbc, 3ES-cbc, Blowfish-cbc)
- User name and password: local authentication and remote authentication via RADIUS/TACACS+
- Denial of Service control

- Management IP filtering (SNMP/Web/Telnet/SSH)
- MAC filtering
- IP Source Guard
- Dynamic ARP inspection (DAI)
- DHCP snooping

Management

- Industrial command-line interface
- CLI filtering
- Telnet/SSH
- Software download/upload: TFTP/Xmodem/FTP
- Configuration download/upload: TFTP/Xmodem/FTP
- Dual image supported
- SNMP v1/v2c/v3
- RMON 1, 2, 3 & 9
- BOOTP: client/relay
- DHCP: client/relay/option 82
- Auto-Installation
- Event/error log: local flash and remote server via system log (RFC3164)
- DNS: client/relay
- NTP/SNTP
- LLDP (802.1ab, Link Layer Discovery Protocol)
- CDP (Cisco Discovery Protocol) version 2
- Port mirroring: one to one & many to one
- sFlow (RFC 3176)
- IPv6 management:
 - IPv4/IPv6 Dual Stack
 - ICMPv6
 - ICMPv6 redirect
 - IPv6 Path MTU Discovery
 - IPv6 Neighbor Discovery
 - stateless auto-configuration
 - manual configuration
 - DHCPv6 (client)
 - SNMP/HTTP/SSH/Telnet over IPv6
 - IPv6 DNS resolver
 - IPv6 RADIUS/TACACS+ support
 - IPv6 Syslog support
 - IPv6 SNTP & NTP
 - IPv6 TFTP
 - IPv6 Ping

Layer 3 Features

- IP Multinetting/CIDR
- /31 subnets
- ARP (static: 128, dynamic: 3968)
- Proxy ARP
- Local proxy ARP
- IRDP
- Static route
- Unicast Routing: RIP v1/v2, OSPF
- ECMP
- Multicast Routing: IGMP v1/v2/v3, DVMRP, PIM-DM/-SM
- VRRP
- Source IP Configuration
- Policy-based routing

IPv6 Layer 3 Features

- IPv6 Layer 3 features
- Static route
- Unicast Routing: RIPng & OSPFv3
- Multicast Routing: MLD v1/v2, PIM-DM6/-SM6
- DHCPv6: relay

Datacenter Features

- Congestion Notification
- Enhanced Transmission Selection
- Priority-based Flow Control
- Datacenter Bridging Extension
- FIP snooping

VM Tracer Features

- VMware vSphere support
- VM Auto Discovery
- VM Adaptive Segmentation
- VM host view

Ethernet Virtual Bridge

- Ethernet Virtual Bridging (EVB, IEEE 802.1Qbg)

Hardware Specifications

Switch Silicon: Broadcom BCM56960 Tomahawk 3.2 Tbps

Physical Ports

- 32 x QSFP28 ports. Each Port supports 1x40/100 GbE or 2 x 50 GbE or 4 x 10/25 GbE per port using splitter cables

Management Ports on front panel:

- 1 x RJ-45 serial console
- 1 x RJ-45 100/1000BASE-T management
- 1 x USB Type A storage port

Performance

- Switching Capacity: 3.2 Tbps
- Forwarding Rate: 4.7 Bpps
- MAC Addresses: up to 136K
- VLAN IDs: 4K
- Jumbo Frames (9216 Bytes)
- Packet Buffer Size: 16 MB integrated packet buffer

Physical and Environmental

- Dimensions (WxDxH): 43.84 x 51.5 x 4.35 cm (17.26 x 20.28 x 1.71 in)
- Weight: 9.65 kg (21.27 lb), with two installed PSUs
- Dimensions (WxDxH): 43.8 x 51.5 x 4.35 cm (17.3 x 20.3 x 1.7 in)
- Weight: 10 kg (23 lb)
- Operating Temperature: 0°C to 45°C (32°F to 113°F)
- Storage Temperature: -40°C to 70°C (-40°F to 158°F)
- Operating Humidity: 5% to 95%
- PSUs: 2 redundant, load-sharing, hot-swappable AC or -48 VDC

Input Voltage: 90 to 240 VAC at 50-60 Hz. -36 to -72 VDC

EMI

- CE Mark (EN55022 Class A), FCC Part 15 Class A, VCCI Class A

Environmental

- Temperature: IEC 68-2-14
- Shock: IEC 68-2-29
- Vibration: IEC 68-2-36, IEC 68-2-6
- Drop: ISTA 2A
- RoHS-6 Compliant

Safety

- CB, UL/CUL

ADARA Management / Configuration Capabilities

ADARA Network Functions Virtualization Software	ADARA Software Defined Networking Software	ADARA Axis Switch
<p>Auto Configuration</p> <ul style="list-style-type: none"> • Cloud Based • Local • Double Touch ICON <ul style="list-style-type: none"> - (Full Keyboard/Mouse not required) 	<p>Auto Configuration</p> <ul style="list-style-type: none"> • Cloud Based • Local • Double Touch ICON <ul style="list-style-type: none"> - (Full Keyboard/Mouse not required) 	<p>Auto Configuration</p> <ul style="list-style-type: none"> • From Bootup
<p>Automated Management</p> <ul style="list-style-type: none"> • Policy Engine Automated CLI Management 	<p>Automated Management</p> <ul style="list-style-type: none"> • Policy Engine Automated CLI Management 	<p>Automated Management</p> <ul style="list-style-type: none"> • Software Defined Networking • Policy Engine Automated CLI Management
<p>Manual</p> <ul style="list-style-type: none"> • CLI Management • GUI (drop down) 	<p>Manual</p> <ul style="list-style-type: none"> • CLI Management • GUI (drop down) 	<p>Manual</p> <ul style="list-style-type: none"> • CLI Management <p>Auto Topology Discovery</p> <ul style="list-style-type: none"> • Link Layer Discovery Protocol • Cisco Discovery Protocol <p>Virtual Machine Auto Discovery</p>

Your next step

ADARA solutions help businesses accelerate growth at a lower total cost of ownership. For more information about ADARA Networks solutions visit www.adaranetworks.com

Corporate Headquarters

ADARA Networks
 2150 N. First Street
 San Jose, CA 95131, USA
 Phone: 408/433-4900
www.adaranetworks.com

ADARA and the ADARA logo are trademarks or registered trademarks of ADARA Networks, Inc., in the United States and other countries. Third party brands, products or trademarks mentioned are the property of their respective owners. Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by ADARA Networks. ADARA Networks reserves the right to change, modify, transfer or otherwise revise this publication without notice.